



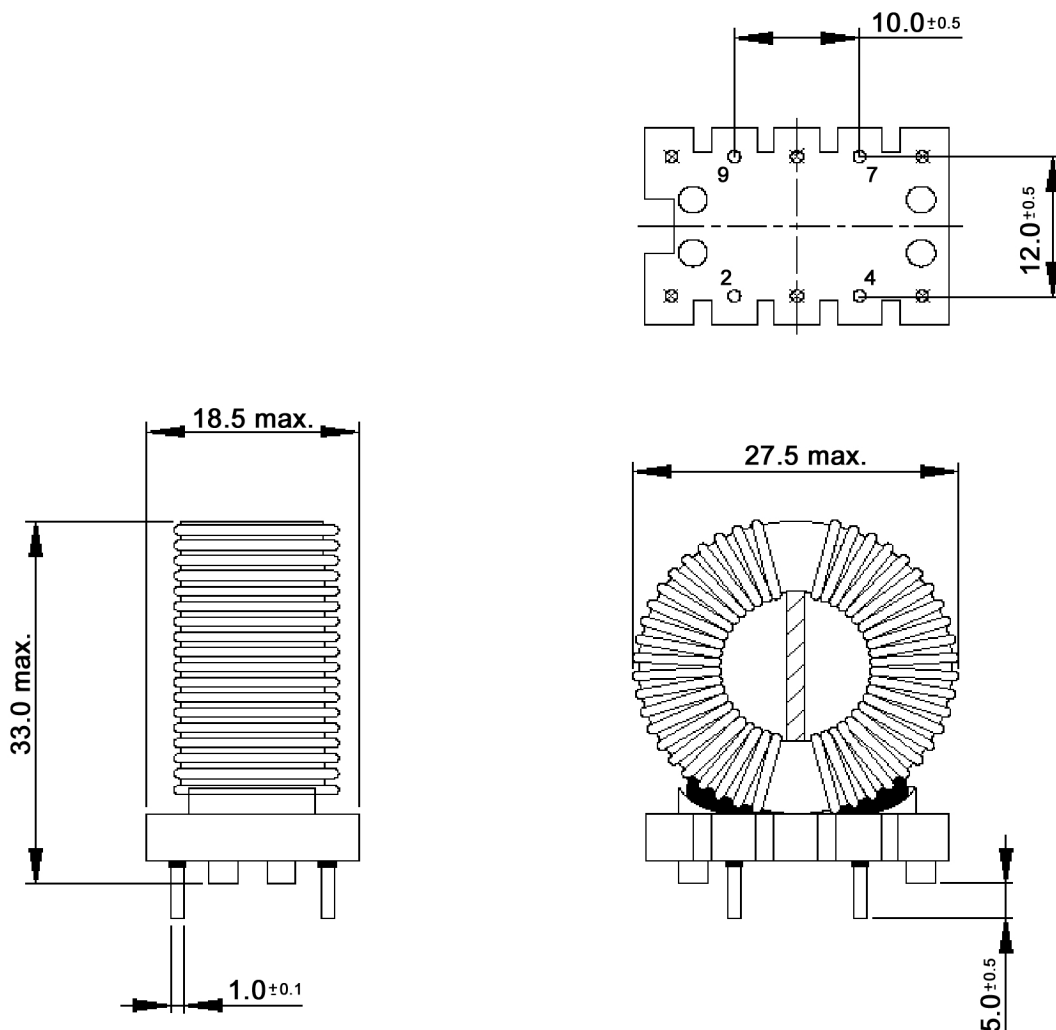

Specifications:

Inductance per winding (10kHz): 3.3 mH +/-30%
 Rated current: 4.0 A (temperature rise 55°C max.)
 Rated voltage: n.a.
 Dielectric strength (line/line): 1500V AC for 2 sec.
 Stray inductance: n.a.
 Resistance per winding: 0.035 Ohm max.
 Operating temperature: n.a.
 Material:
 Core: MnZn, M7K
 Wire: PU-enamelled copper, E63382, E45523
 Tin: Sn99.3Cu0.7 or Sn99Ag0.3Cu0.7
 Base: Phenolic resin, UL94V-0, E59481
 Glue: Epoxy
 Separator: PA66, UL94V-0, E54080
 Varnish: V1630FS, E314793

SCHEMATIC



Compliance: RohS II (2011/65/EU)

tolerances	knitter-inductive	Product Data-sheet	2 00 36
			page 1/1
	drawn: D. Rauschert, 03/16	Common Mode Choke	
	approved: C. Schmid, 03/16		
	Part Number	ICSC33540601LVS2	
Revised, 07/16, dr			
date: modification, name			