
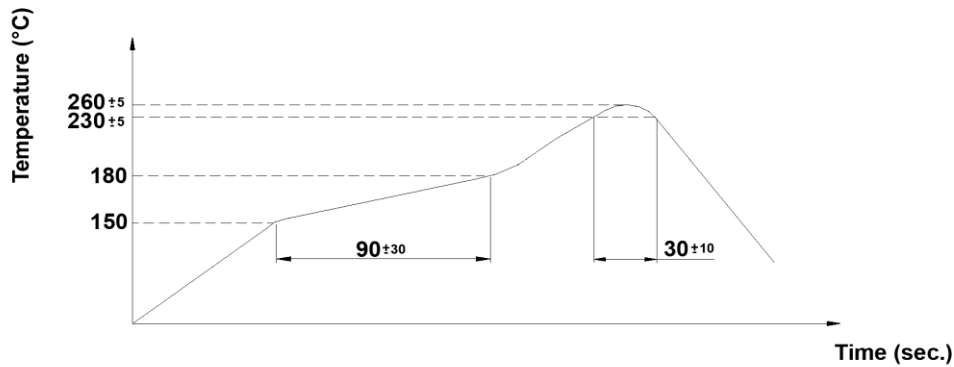


P.C.B. LAYOUT



Specifications:

- Impedance (100 MHz): see table "xxxxxx"
- Rated current: see table "xxxxxx" (temperature rise 40°C typ.)
- Resistance: see table "xxxxxx"
- Operating Temperature: -55°C to +125°C
- Packaging size: 4000 pcs. / reel

Compliance: RohS II (2011/65/EU)

tolerances	<b>knitter-inductive</b>	Product Data-sheet	<b>2 08 14</b>
			page 1/8
	drawn: D. Rauschert, 02/19	<b>Bead</b>	
	approved: C.Schmid, 02/19		
	Part Number	<b>ICSBxxxxxxI2SHyST22</b>	
06/23, Add "22A256", dr			
03/19, Update graphs, dr			
date: modification, name			

"xxxxxx"	"y"	Impedance ( $\Omega$ ) at 100MHz	DC Resistance ( $\Omega$ ) max.	Rated Current (mA) max.
508106	R	5	0,100	1000
109206	R	10	0,060	2000
109216	R	10	0,060	2000
119306	R	11	0,030	3000
209306	R	20	0,030	3000
229306	R	22	0,030	3000
259306	R	25	0,030	3000
289306	R	28	0,030	3000
309106	R	30	0,150	1000
309306	R	30	0,030	3000
409306	R	40	0,050	3000
479306	R	47	0,050	3000
509306	R	50	0,040	3000
609206	R	60	0,100	2000
609306	R	60	0,040	3000
689306	R	68	0,050	3000
809256	R	80	0,080	2500
809266	R	80	0,040	2500
10A106	R	100	0,200	1000
10A206	R	100	0,100	2000
10A256	R	100	0,100	2500
10A306	R	100	0,030	3000
12A256	R	120	0,100	2500
12A266	R	120	0,100	2500
15A256	R	150	0,100	2500
15A266	R	150	0,100	2500
18A206	R	180	0,150	2000
22A206	R	220	0,150	2000
22A216	R	220	0,150	2000
22A256	R	220	0,050	2500

"y"	Impedance tolerance
R	$\pm 25\%$

Compliance: RohS II (2011/65/EU)

tolerances	<b>knitter-inductive</b>	Product Data-sheet	<b>2 08 14</b>
			page 2/8
	drawn: D. Rauschert, 02/19	<b>Bead</b>	
	approved: C.Schmid, 02/19		
	Part Number	<b>ICSBxxxxxxI2SHyST22</b>	
06/23, Add "22A256", dr			
03/19, Update graphs, dr			
date: modification, name			

"xxxxxx"	"y"	Impedance ( $\Omega$ ) at 100MHz	DC Resistance ( $\Omega$ ) max.	Rated Current (mA) max.
30A206	R	300	0,150	2000
30A216	R	300	0,150	2000
30A226	R	300	0,150	2000
33A206	R	330	0,150	2000
47A106	R	470	0,200	1000
47A116	R	470	0,200	1000
60A106	R	600	0,200	1000
60A116	R	600	0,200	1000
60A126	R	600	0,200	1000

"y"	Impedance tolerance
R	$\pm 25\%$


Compliance: RohS II (2011/65/EU)

tolerances	<b>knitter-inductive</b>	Product Data-sheet	<b>2 08 14</b>
			page 3/8
	drawn: D. Rauschert, 02/19	<b>Bead</b>	
	approved: C.Schmid, 02/19		
	Part Number	<b>ICSBxxxxxxI2SHyST22</b>	
06/23, Add "22A256", dr			
03/19, Update graphs, dr			
date: modification, name			


ICSB508106I2SHRST22




ICSB109206I2SHRST22

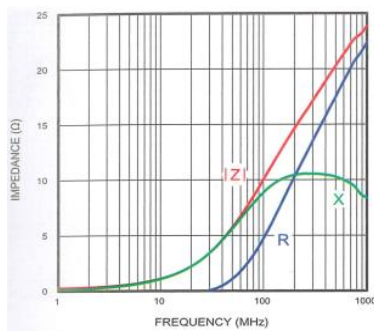


ICSB109216I2SHRST22

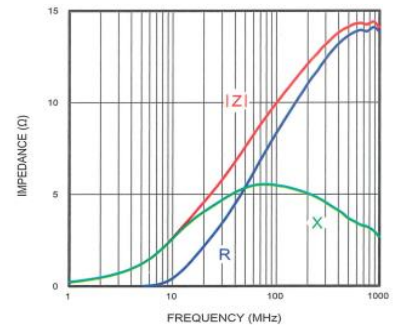


ICSB119306I2SHRST22

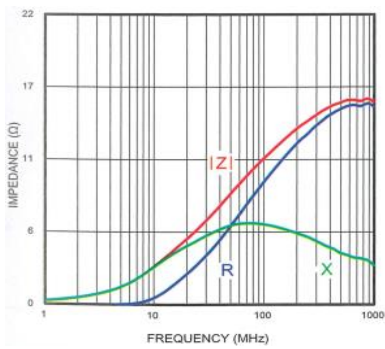


ICSB209306I2SHRST22

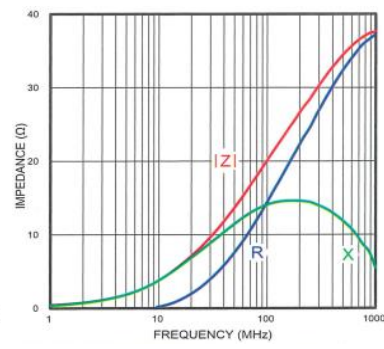


ICSB229306I2SHRST22

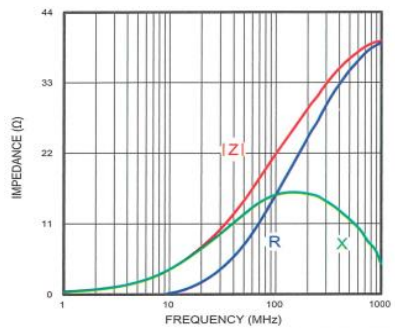


ICSB259306I2SHRST22

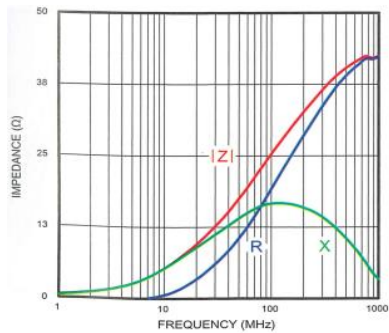

ICSB289306I2SHRST22

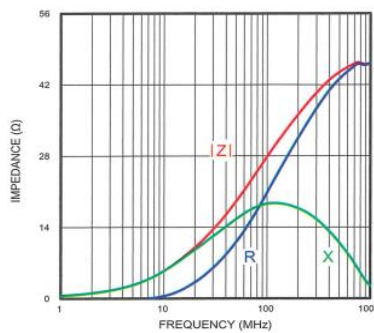


ICSB309106I2SHRST22

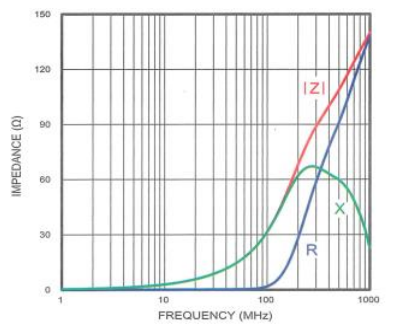


Compliance: RohS II (2011/65/EU)

tolerances	<b>knitter-inductive</b>	Product Data-sheet	<b>2 08 14</b>
			page 4/8
	drawn: D. Rauschert, 02/19	<b>Bead</b>	
	approved: C.Schmid, 02/19		
	Part Number	<b>ICSBxxxxxI2SHyST22</b>	
06/23, Add "22A256", dr			
03/19, Update graphs, dr			
date: modification, name			


ICSB309306I2SHRST22

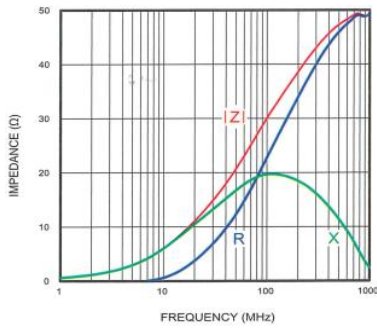


ICSB409306I2SHRST22

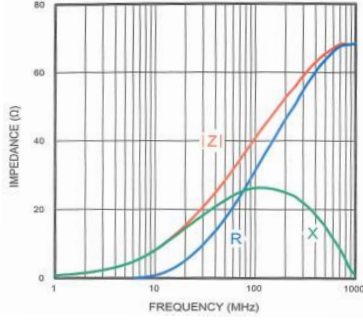


ICSB479306I2SHRST22

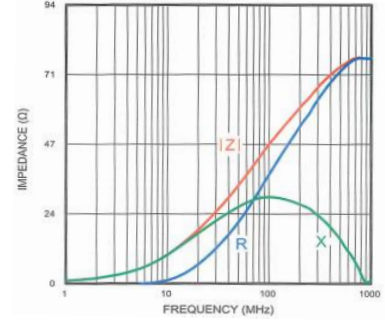


ICSB509306I2SHRST22

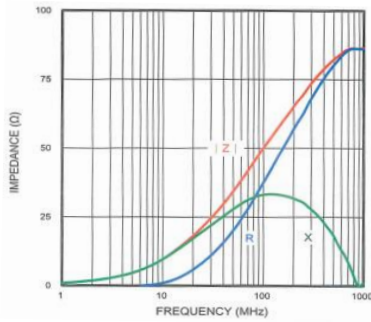


ICSB609206I2SHRST22

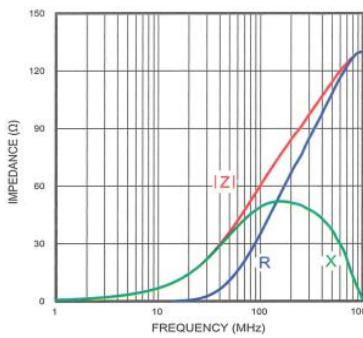


ICSB609306I2SHRST22

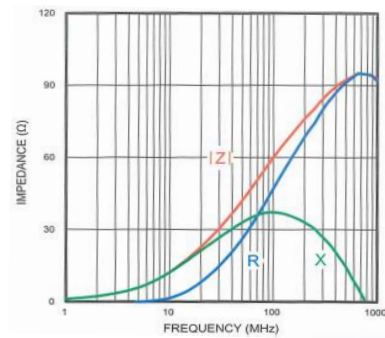


ICSB689306I2SHRST22

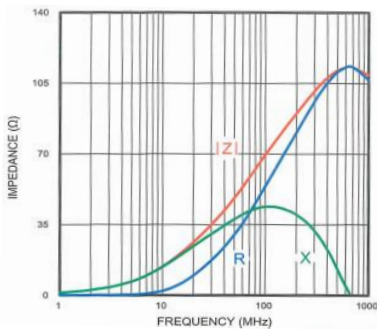

ICSB809256I2SHRST22

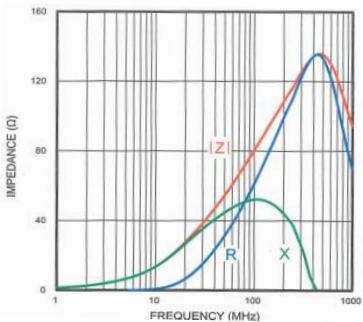


ICSB809266I2SHRST22

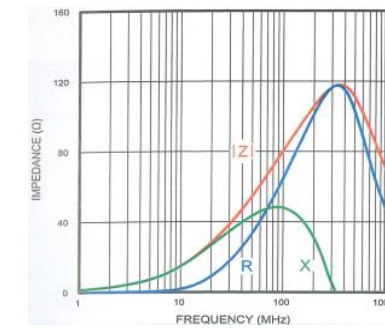


Compliance: RohS II (2011/65/EU)

tolerances	<b>knitter-inductive</b>	Product Data-sheet	<b>2 08 14</b>
			page 5/8
	drawn: D. Rauschert, 02/19	<b>Bead</b>	
	approved: C.Schmid, 02/19		
	Part Number	<b>ICSBxxxxxI2SHyST22</b>	
06/23, Add "22A256", dr			
03/19, Update graphs, dr			
date: modification, name			


ICSB10A106I2SHRST22

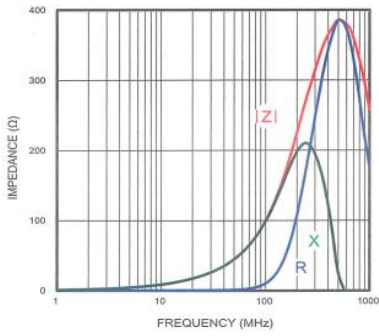


ICSB10A206I2SHRST22

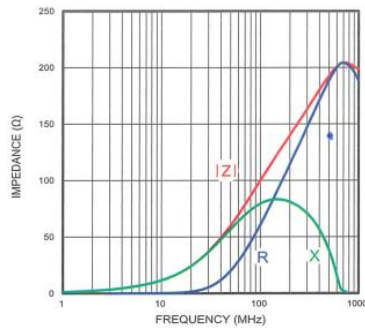


ICSB10A256I2SHRST22

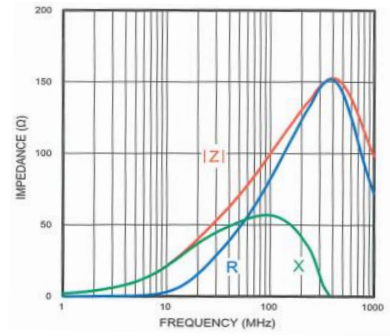


ICSB10A306I2SHRST22

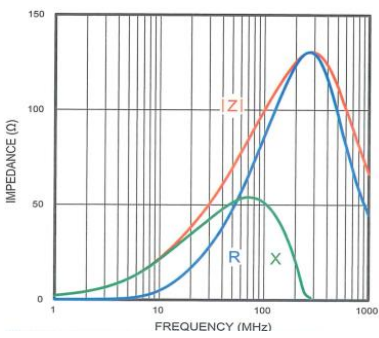


ICSB12A256I2SHRST22

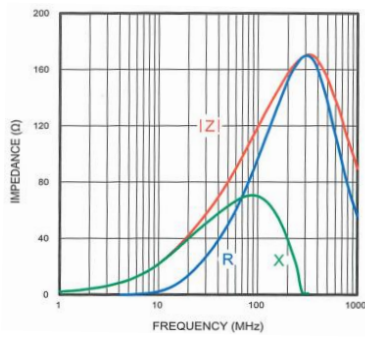


ICSB12A266I2SHRST22

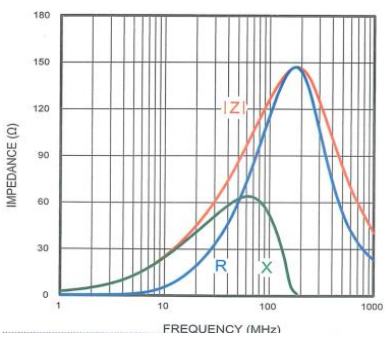


ICSB15A256I2SHRST22

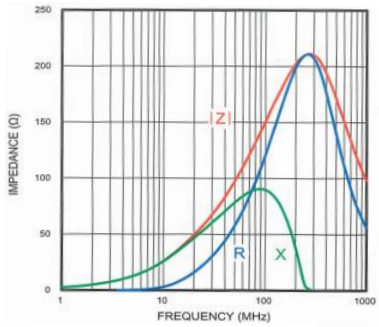

ICSB15A266I2SHRST22

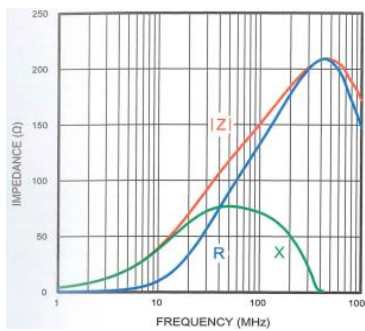


ICSB18A206I2SHRST22

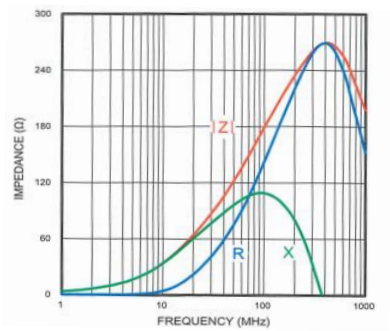


Compliance: RohS II (2011/65/EU)

tolerances	<b>knitter-inductive</b>	Product Data-sheet	<b>2 08 14</b>
			page 6/8
	drawn: D. Rauschert, 02/19	<b>Bead</b>	
	approved: C.Schmid, 02/19		
	Part Number	<b>ICSBxxxxxI2SHyST22</b>	
06/23, Add "22A256", dr			
03/19, Update graphs, dr			
date: modification, name			


ICSB22A206I2SHRST22

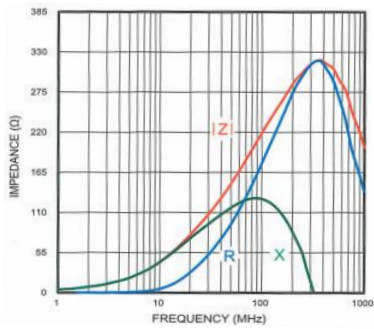


ICSB22A216I2SHRST22

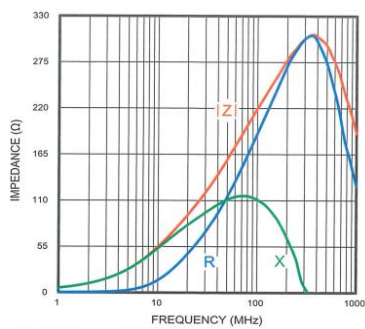


ICSB22A256I2SHRST22

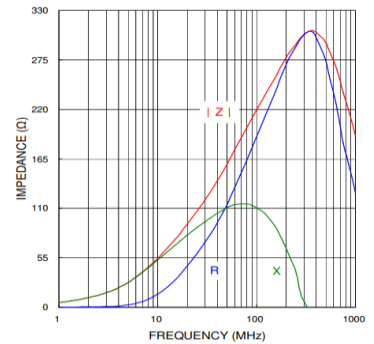


ICSB30A206I2SHRST22

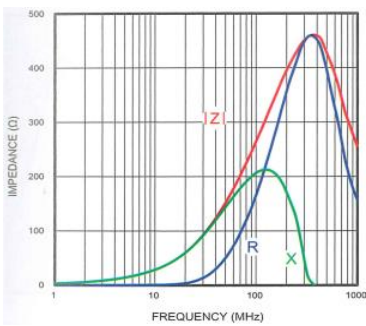


ICSB30A216I2SHRST22

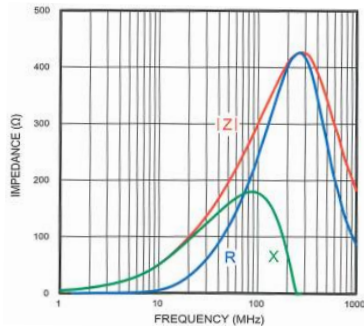


ICSB30A226I2SHRST22

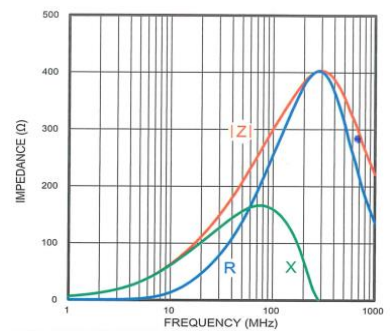


ICSB33A206I2SHRST22

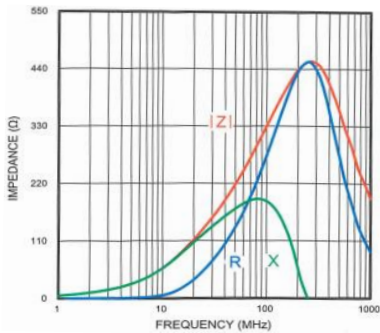

ICSB47A106I2SHRST22

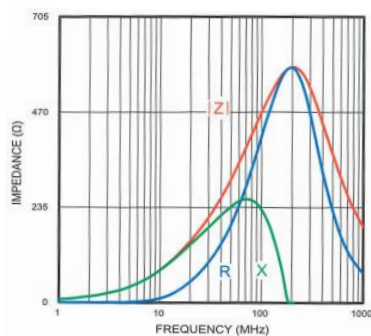


ICSB47A116I2SHRST22

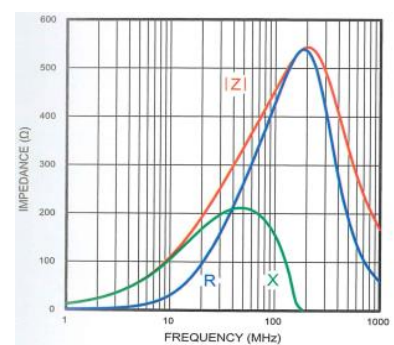


Compliance: RohS II (2011/65/EU)

tolerances	<b>knitter-inductive</b>	Product Data-sheet	<b>2 08 14</b>
			page 7/8
	drawn: D. Rauschert, 02/19	<b>Bead</b>	
	approved: C.Schmid, 02/19		
	Part Number	<b>ICSBxxxxxI2SHyST22</b>	
06/23, Add "22A256", dr			
03/19, Update graphs, dr			
date: modification, name			


ICSB60A106I2SHRST22

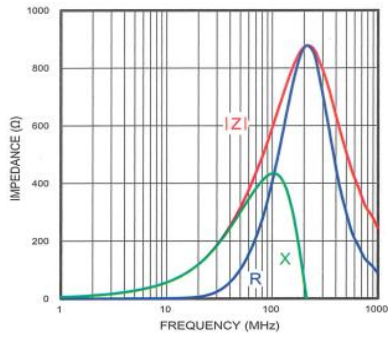

ICSB60A116I2SHRST22

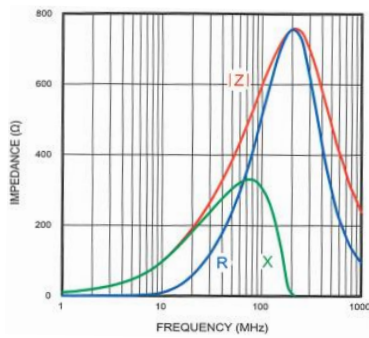

ICSB60A126I2SHRST22

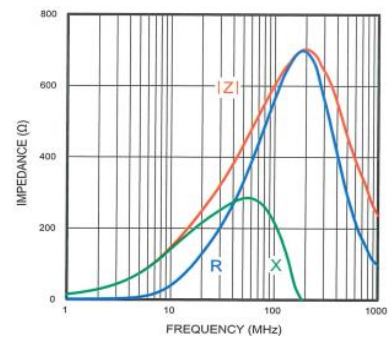

Compliance: RohS II (2011/65/EU)

tolerances	<b>knitter-inductive</b>	Product Data-sheet	<b>2 08 14</b>
			page 8/8
	drawn: D. Rauschert, 02/19	<b>Bead</b>	
	approved: C.Schmid, 02/19		
	Part Number	<b>ICSBxxxxxI2SHyST22</b>	
06/23, Add "22A256", dr			
03/19, Update graphs, dr			
date: modification, name			