


SCHEMATIC

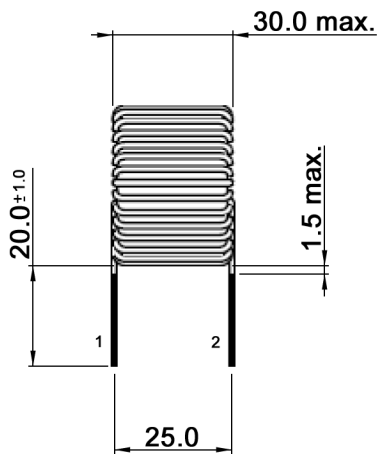

Specifications:

Inductance (10 kHz):	739 μ H $\pm$ 10%
Rated current:	12 A
Inductance at rated current:	560 μ H $\pm$ 10%
Resistance:	39.7 mOhm max.
Dielectric strength:	500 V (line to core)
Material:	n.a.
Compliance:	RohS II (2011/65/EU)

Tolerances:			Date	Name	ICSP 56412700 LVK-1	
			02/17	dr		
					ICS 2 02 57	
Modifications	Date	Name				Page
						1/1