


CIRCUIT DIAGRAM

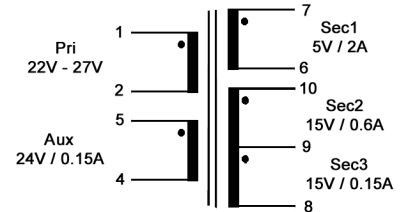

Specifications:

Turns ratio: 1:1.16:0.25:0.83:0.75 (Pri:Aux:Sec1:Sec2:Sec3)
 Inductance: Pri: 14.5 μ H +/-10%
 Rated current: see circuit diagram
 Rated voltage: see circuit diagram
 Operating frequency: n.a.
 Dielectric strength: 1500 V AC (Pri. to Sec.)
 1000 V AC (coil to core)
 Stray inductance: n.a.
 Resistance per winding: n.a.
 Primary voltage-time-constant: n.a.
 Operating temperature: -40°C to +125°C
 Material: n.a.
 Compliance: RohS II (2011/65/EU)

Tolerances:			Date	Name
			03/16	dr
Revised	05/16	dr		
Modifications	Date	Name		

ICST 14313100 LHK-1

ICS

2 00 44

Page

1/1