

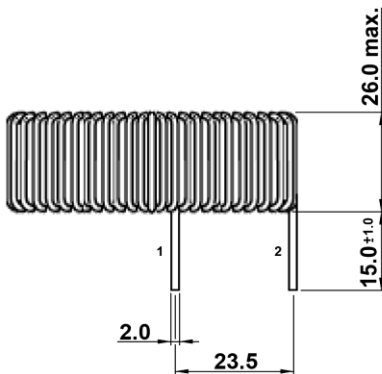


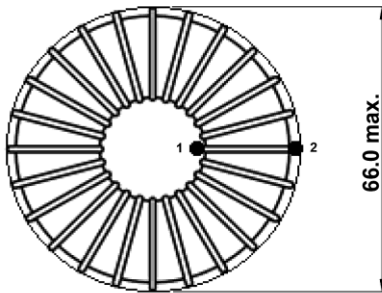

SCHEMATIC



Specifications:

Rated current:	25 A
Rated inductance 0 A (10 kHz, 0.25 A):	345 μ H typ.
Rated inductance 25 A (10 kHz, 0.25 A):	243 μ H typ.
Rated voltage:	250 V AC
Resistance:	23.0 mOhm typ.
Operating temperature:	-40°C to +125°C
Material:	n.a.

Compliance: RohS II (2011/65/EU)

tolerances	knitter-inductive	Product Data-sheet	2 03 31
			page 1/1
	drawn: D. Rauschert, 07/17	PFC choke	
	approved: C.Schmid, 07/17		
	Part Number	ICSP24425700LHM1	
03/19, Update drawing, dr			
date: modification, name			