
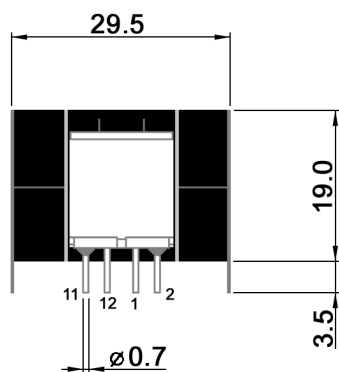
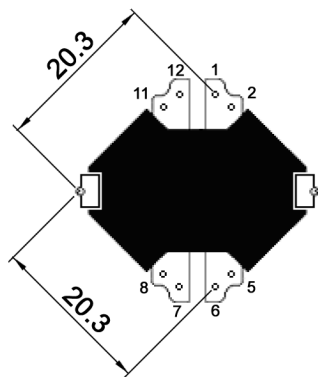


SCHEMATIC



Specifications:

Inductance (10 kHz, 1.0 V):	400 μ H +/-5%
Inductance at full load:	n.a.
Rated current:	2.0 A
Saturation current:	n.a.
Resistance:	n.a.
Dielectric strength (line/line):	2000 V AC for 2 sec.
Operating temperature:	-20°C to +125°C
Material:	n.a.
Compliance:	RohS II (2011/65/EU)

tolerances	ICS	Product Data-sheet	2 03 43
			page 1/1
	drawn: D. Rauschert, 11.07.2017	PFC choke	
	approved: J. Hansen, 11.07.2017		
	Part Number	ICSP40420600LAJ1	
date: modification, name			